

## T8 ADVANTAGE, “One fits All” T8WH-4F5K-AC16-SM33





Colex T8 ADVANTAGE is the ideal lamp solution that works with any type of input voltage and configuration. Not need to match the driver anymore; operating on either electromagnetic ballasts or HF electronic ballasts or 100-277 VAC connection. No longer need to stock two types of tubes!

### Specifications

<b>Cap-Base</b>	G13	<b>Dimmable</b>	No
<b>Bulb</b>	T8	<b>Wattage Equivalent</b>	32W – 40W Fluorescent
<b>Bulb Finish</b>	Plastic Frosted / Clear	<b>Luminous Efficacy</b>	150 Lumens/Watt
<b>Light color</b>	2700K to 6500K	<b>Warranty</b>	5 Years
<b>Nominal Lifetime</b>	50000 hours	<b>Dimensions</b>	2Ft, 3Ft, 4Ft, 2Ft U shape
<b>Working Temperature</b>	-20C ~+40C	<b>Color Rendering Index (CRI)</b>	>82
<b>Beam Angle</b>	180 °	<b>Certifications</b>	UL, DLC
<b>Wattage</b>	16W – 20W	<b>Line Frequency</b>	60 HZ
<b>Voltage</b>	100VAC - 277VAC	<b>Power Factor</b>	>.95

### Input configurations

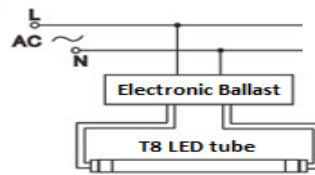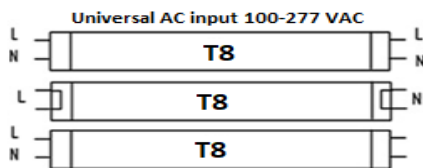

### Ordering

T8WH-4F5K-AC16-SM33  
T8WH-4F5K-AC18-SM33  
T8WH-4F5K-AC20-SM33